

iAuCS®

Manitowoc Automatic Cleaning System

iAuCS | iBAuCS

SIZE

- 12" (30.48 cm) wide
  3.43" (8.7 cm) deep
  12.12" (30.78 cm) high

SPECIFICATIONS

Power

- iAuCS
  - 115/60/1 or 208-230/60/1
  - Electricity drawn directly from the ice machine
  - 0.1 amp
- iBAuCS
  - 115/60/1 or 208-230/60/1
  - Factory pre-wired with an 11' (335 cm) power cord and NEMA 5-15P plug.
  - 0.1 amp

Replenishment

- iAuCS cleaning or sanitizing fluid is provided in either 16 oz. replacement bottles or 1 gallon containers for refilling.
- The iAuCS ships with an empty 16 oz bottle for filling either decaler or sanitizer.

FEATURES

- Compact. Efficient. Hassle-Free Maintenance.
- Sleek stainless steel exterior durable and modern finish that complements any environment.
- Flexible installation options: mount directly on the ice bin or wall to suit your space.
- Space-saving design. Just 12" (30.48 Cm) wide, 3.43" (8.7 Cm) deep, 12.12" (30.78 Cm) high.
- Automated cleaning made easy. The iaucs accessory schedules and performs routine cleaning of your manitowoc ice machine—automatically and reliably.
- Reduces service costs. Virtually eliminates the need for manual cleaning by a technician, saving time and money.
- Smart preventative maintenance. Regular cleaning lowers total operating costs. Simply select your preferred cleaning frequency (every 0.5 To 6 months) via the indigo nxt easytouch® display, and iaucs handles the rest.
- Cost-effective solution. The entire system costs less than three manual cleanings—making it a smart investment.
- Dual functionality. Dispenses either decaler or sanitizer (not both simultaneously). Refer to the Installation, Use & Care Manual for proper solution selection and changeover procedures. Only use Manitowoc-approved decaler or sanitizer.
- Targeted Cleaning Performance
- Decaler: Removes lime scale and mineral deposits.
- Sanitizer: Controls algae, slime, and airborne bacteria like yeast.
- Model Compatibility
  - iAuCS: For all Indigo NXT Cuber models
  - iBAuCS: For all Indigo NXT IB models
- Quick cleaning cycle. Takes approximately 30 minutes depending on machine size. The system drains and refills the water trough, dispenses solution, performs a wash cycle, and completes multiple rinses. Ice production resumes automatically after cleaning.

NOTE: iAuCS Automatic Cleaning System cannot be used with undercounter ice machines or flake/nugget ice machines.

iAuCS®


Manitowoc Automatic Cleaning System

iAuCS | iBAuCS


INSTALLATION

The iAuCS is mounted on the wall near the ice machine or on the bin with the included bracket and hardware. iAuCS line voltage is obtained from the ice machine.

The iBAuCS line voltage requires external supply (unit comes pre-wired with 11' cord and NEMA 15-5P plug). For R290 models, installation is required on the left-hand side of the ice machine.

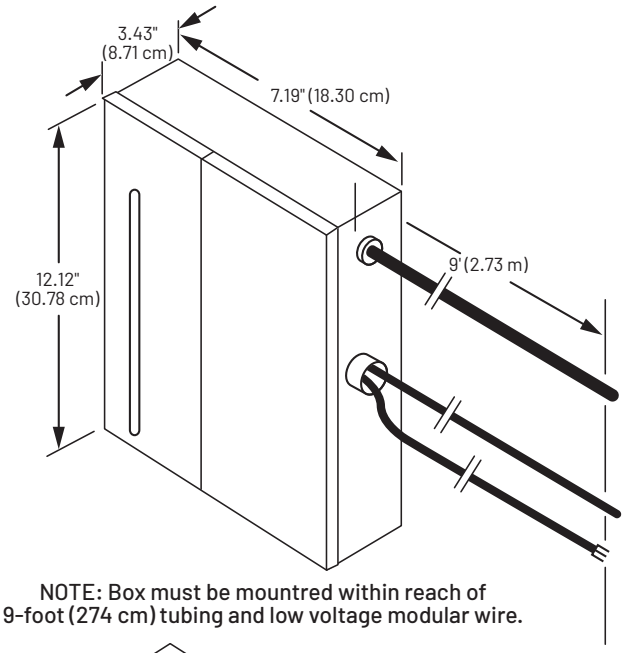

NOTE: Box must be mountred within reach of 9-foot (274 cm) tubing and low voltage modular wire.

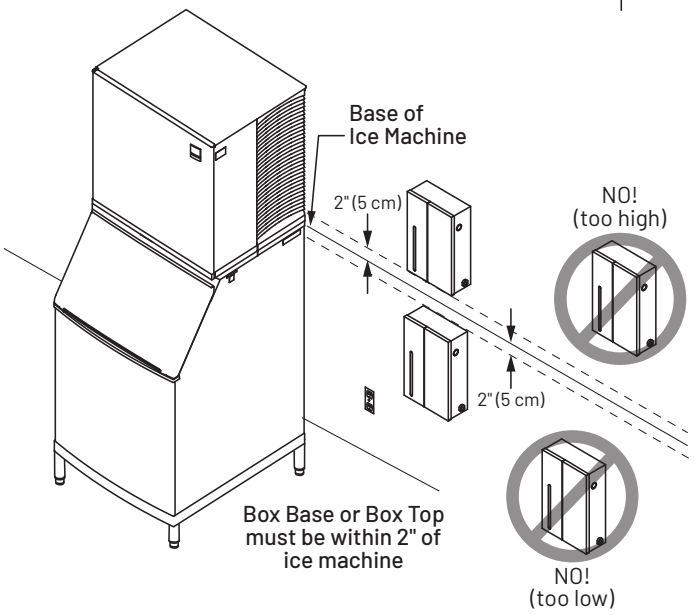

Limited Commercial Warranty

Three (3) years parts and labor

Manitowoc
FROM PENTAIR WATER SOLUTIONS

2110 South 26th Street | Manitowoc, WI 54220 | United States
+1.920.682.0161 | 920.683.7589 Fax | manitowocice.com

All indicated Pentair trademarks and logos are property of Pentair. Third party registered and unregistered trademarks and logos are the property of their respective owners. ©2025 Pentair. All rights reserved. Manitowoc Ice reserves the right to make changes to the design or specifications without prior notice.