
Manitowoc®
ICE MACHINES & REACH-INS

INSTALLATION INSTRUCTIONS
LEG SET/CASTER KIT
MODELS AV1A, AV2A, AV3A

WARNING: The leg set (or optional caster kit) must be installed during the initial installation of the reach-in. Installing it after the reach-in has been installed may cause damage to the reach-in or serious bodily harm.

1. Uncrate the reach-in.
2. Be sure the shelves, legs, housing parts, and leg fasteners are removed from inside the cabinet.
3. Lay the cabinet on its back, as to not damage the drain tube cover. (Lay it on cardboard or carpeting so not to damage the cabinet.)
4. Install the legs (or optional caster kit) with the 5/16" bolts provided (four bolts for each leg).
5. Carefully stand the reach-in cabinet up and install into place.

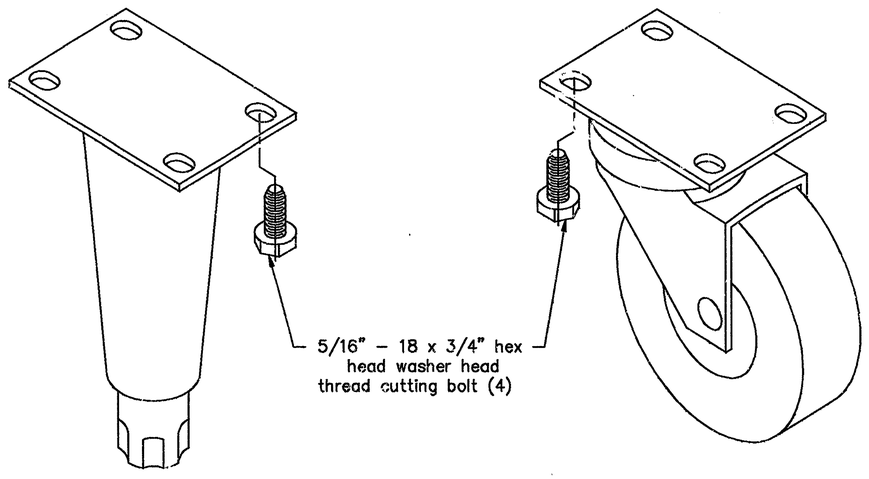

MANITOWOC EQUIPMENT WORKS
Division of The Manitowoc Company, Inc. • 2110 South 26th Street, P.O. Box 1720, Manitowoc, WI 54221-1720 U.S.A.
Phone: 414-682-0161 • RCA Telex 297863 MANCO-UR • FAX 414-683-7879

0866
01/92

SYM	DESCRIPTION OF REVISIONS	E.C.O.	BY	APP	DATE

ITEM NO.	NO. REQD	DESCRIPTION	MATERIAL	PART NO.
1	–	INSTALLATION INSTRUCTIONS		8008663

TOLERANCE UNLESS SPECIFIED
.00=±.03, .000=±.015, ANG=±1°
DO NOT SCALE THIS DRAWING

THIS PRINT REMAINS THE PROPERTY OF MANITOWOC EQUIPMENT WORKS ALL INFORMATION CONTAINED THEREON IS CONFIDENTIAL. IT IS LOANED, SUBJECT TO RETURN UPON DEMAND, AND ON EXPRESS CONDITION THAT IT IS NOT TO BE COPIED OR USED DIRECTLY OR INDIRECTLY IN ANY WAY WHATSOEVER DETRIMENTAL TO OUR INTERESTS.

MANITOWOC EQUIPMENT WORKS
MANITOWOC, WISCONSIN

TITLE: INSTALLATION INSTRUCTIONS

DR	APP	E.C.O.	SIZE	DWG NO.	SHEET
KRH	BD	3366	C	800866	1 OF 1
SCALE: 0.50 = 1.00		DATE: 01/06/92			