INDIGO® NXT

iT0900N

Manitowoc Ice Cube Machine

IDT0900N | IYT0900N





JCT1200 Remote Condenser

Indigo NXT Series IT0900N
Ice Machine on a D570 Bin

Ice machine, bin, and remote condenser sold separately.

ICE SHAPES



- **Half-Dice:** 3/8" x 1⅛" x 7/8" (0.95 x 2.86 x 2.22 cm)



- **Dice:** 7/8" x 7/8" x 7/8" (2.22 x 2.22 x 2.22 cm)

SIZE

- Up to 869 lbs (394 kgs) of daily ice production
- 30" (76.20 cm) wide, 34" (72.4 cm) deep, and 76.50" (194.31 cm) high including 6" (15.24 cm) legs
- 532 lbs (241 kgs) ice storage capacity*

*Application capacity based on 90% volume x 33 lbs./ft³ average density of ice

SPECIFICATIONS

Refrigerant: R-410A CFC-Free

BTU Per Hour

- 12,700 (average)
- 14,800 (peak)

Compressor: Nominal Rating - 1.5 HP

Operating Limits

- Ambient temperature range: 40° to 110° F (4.4° to 43.3° C)
- Remote condenser: -20° to 120° F (-29° to 49° C)
- Water temperature range: 40° to 90° F (4.4° to 32.2° C)
- Water pressure ice maker (water in)
  - Min. 20 psi (137.9 kPA)
  - Max. 80 psi (551.1 kPA)

Power

- 208-230/60/1, 208-230/60/3 (230/50/1 also available)
- Minimum Circuit Ampacity
  - 208-230/60/1: 9.1 amps
  - 208-230/60/3: 7.7 amps
  - 208-230/50/1: 7.1 amps
- Maximum Fuse Size
  - 15 amps
  - HVACR-type circuit breakers can be used in place of fuses

FEATURES

- Sanitation
  - Hinged front door and removable components (water trough, tube, curtain, probe, pump) allow easy interior access and cleaning.
  - Select parts feature AlphaSan® antimicrobial protection.
  - DuraTech™ exterior provides superior corrosion resistance compared to stainless steel. Innovative clear coat resists finger prints and dirt.
  - Optional LuminIce® Growth Inhibitor helps control bacteria and yeast, with status indicator on display.
- Sustainability & Value
  - R410a has a 46.8% lower global warming potential compared to R404a.
  - Energy-efficient models (see EnergyStar.gov)
  - Icon-based easyTouch® display simplifies operation.
  - Acoustical probe and Active Sense help ensure consistent ice production.
  - 24-hour diagnostics support preventative maintenance.
  - Designed with programmable ice production to take advantage of off-peak rates and/or shut off over night to lower lifetime costs.*

*Based on manufacturer assumptions without independent testing. Results may vary by settings and conditions.

ACCESSORIES & KITS

- LuminIce® II virus and bacteria inhibitor controls viruses and bacteria in the ice machine.
- External scoop holder.
- Arctic Pure® Plus water filters reduce sediments and chlorine contaminants down to 0.5 microns. Use with a pre-filter is recommended.
- iAuCS® schedules and performs routine ice machine cleaning automatically.



Luminice II



External Scoop Holder



Arctic Pure Water Filters



iAuCS®

Manitowoc
FROM PENTAIR WATER SOLUTIONS

iT0900N

Manitowoc Ice Cube Machine

IDT0900N | IYT0900N

INSTALLATION

Ice machine must be installed indoors

Minimum clearances:
- top and sides: 8" (30.5 cm)
- back: 5" (12.7 cm)

A Electrical Entrance (2) Options

B 3/8" (0.95 cm) F.P.T. Water Condenser Inlet (water-cooled units)

C 1/2" (1.27 cm) F.P.T. Water Condenser Outlet (water-cooled units)

D 1/2" (1.27 cm) Auxiliary Base Drain Socket

E 3/8" (0.95 cm) F.P.T. Ice Making Water Inlet

F 1/2" (1.27 cm) F.P.T. Ice Making Water Drain

G 3/4" (1.91 cm) Bin Drain

H 6.0" (14.24 cm)

I 3.5" (8.89 cm)


J 3.88" (9.85 cm)


K 12.13" (30.81 cm)

L 1.5" (3.81 cm)

M 6.5" (16.51 cm)

N optional
20.0" (50.80 cm)
16.0" (40.64 cm)

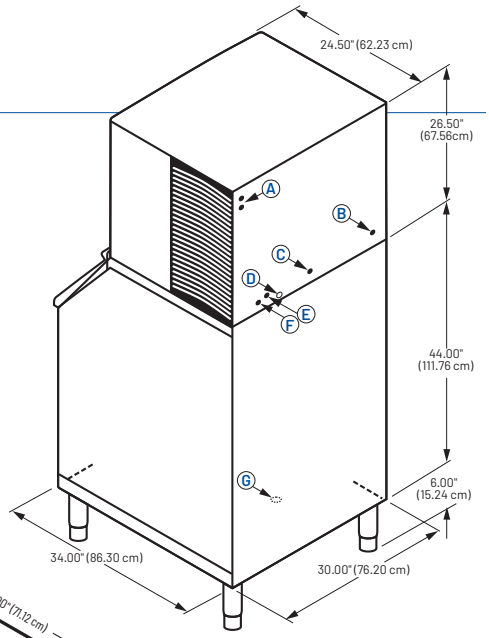

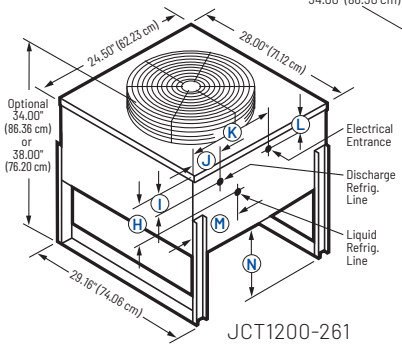

JCT1200-261

Standard Remote Tubing Kits

Model	Tube Length
RT35R410	35 ft (10.70 m)
RT50R410	50 ft (15.20 m)

Tubing Kits come pre-charged with quick connects.

SPACE-SAVING DESIGN



	iT0900N D570
Height	76.5" 194.31 cm
Width	30" 76.2 cm
Depth	34.0" 86.36 cm
Bin Storage	532 lbs 241.14 kgs

Height includes adjustable bin legs 6.00" to 8.00", (15.24 to 20.32 cm) set at 6.00" (15.24 cm).

Bin capacity is based on 90% of the volume x 33 lbs/ft³ average density of ice.

Ice machine, bin, and remote condenser sold separately.

SPECIFICATIONS

	Model	Ice Shape	Shipping Weight	Ice Production 24 Hours: 70°Air/50°F Water 21°Air/10°C Water	Ice Production 24 Hours: 90°Air/70°F Water 32°Air/21°C Water	@ 90° Air/70°F Water (32° Air/21°C Water): Power Usage kWh per 100 lbs ice	@ 90° Air/70°F Water (32° Air/21°C Water): Ice Machine Potable water usage per 100 lbs ice
Remote Air-Cooled	IDT0900N-261	Dice	221 lbs (100 kgs)	830 lbs (376 kgs)	695 lbs (315.2 kgs)	4.85 ★	19 Gal 71.9 L)
	IYT0900N-261	Half-Dice	218 lbs (99 kgs)	837 lbs (380 kgs)	731 lbs (332 kgs)	4.66 ★	20 Gal (75.7 L)
	IYT0900N-263	Half-Dice	216 lbs (98 kgs)	869 lbs (394 kgs)	746 lbs (338 kgs)	4.9	14.59 Gal (55.2 L)

★ Energy Star Model

Limited Warranty

Ice Maker Three (3) years parts and labor
Evaporator Five (5) years parts and labor
Compressor Five (5) years parts, three (3) years labor

For complete warranty terms, visit manitowocice.com/service/warranty. A free copy of the written warranty is available by contacting Pentair at 920-682-0161

Manitowoc
FROM PENTAIR WATER SOLUTIONS

2110 South 26th Street | Manitowoc, WI 54220 | United States
+1.920.682.0161 | 920.683.7589 Fax | manitowocice.com

All indicated Pentair trademarks and logos are property of Pentair. Third party registered and unregistered trademarks and logos are the property of their respective owners. ©2026 Pentair. All rights reserved.