
Metrex High Pressure Water Regulating Valve Replacement Instructions

The replacement Metrex water regulating valve may look different from the original valve; however the function is exactly the same.

1. First, recover the refrigerant charge from the system.
2. Remove the old valve and mounting brackets.
3. Two new brackets are supplied with the new valve, slip one bracket over each end of the new valve.
   Note: Do not remove bolts from the new valve!
4. The new valve mounts to the inside of the rear panel using the existing mounting holes in the panel.
5. Braze the valve's pressure line fitting back into the high side of the system.
6. Evacuate the system and charge with nameplate refrigerant charge. (If using a pinch off tool, skip this step).
7. Leak check the system.
8. Start the unit, watch the system head pressure and adjust if needed. Refer to the serviceman's hand book of the correct head pressure setting.

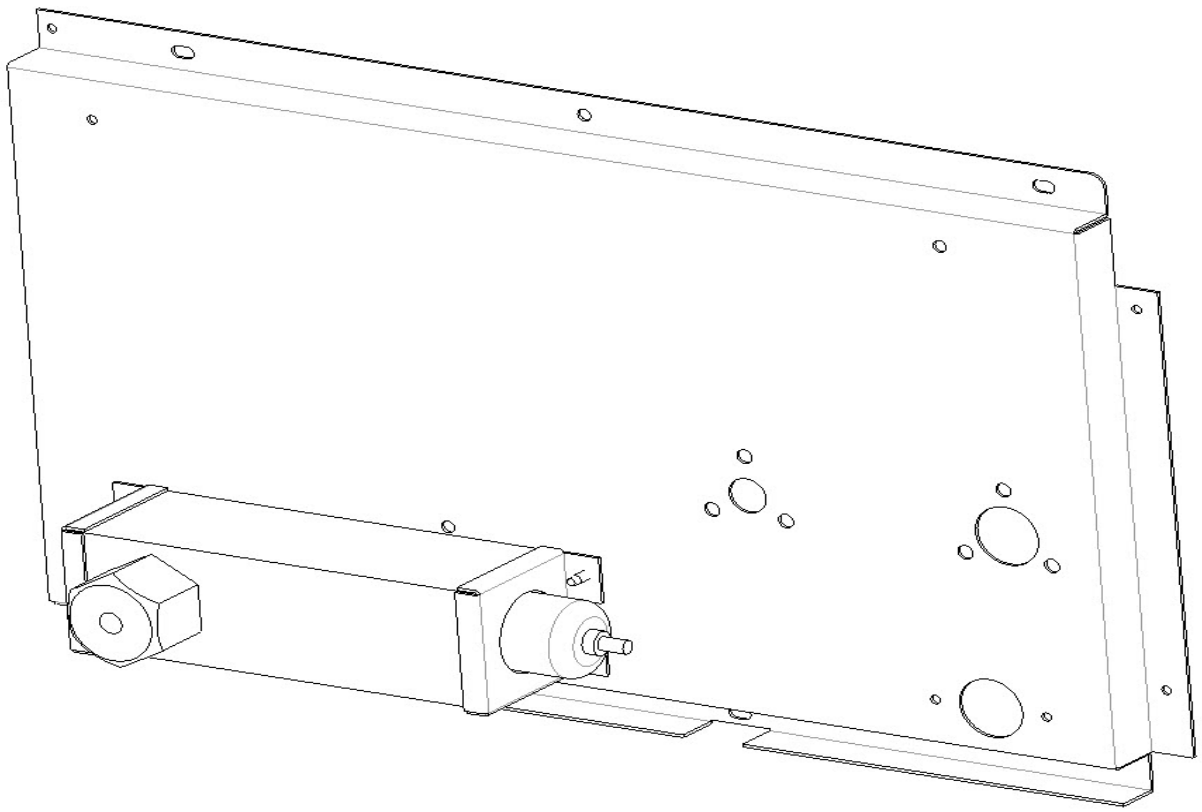

Manitowoc Ice
2110 South 26th Street, P.O. Box 1720, Manitowoc, WI 54221-1720 USA
Telephone 920-682-0161, Fax - Sales: 920-683-7589, Service/Parts: 920-683-7585, Other: 920-683-7879
Web Site - www.manitowocice.com