ICE LEVEL SENSOR

ACCESSORY KIT – INSTALLATION INSTRUCTIONS

Warning! Disconnect electrical power to the ice machine before proceeding.

1. ADHERE BRACKET TO BACK LEFT CORNER OF BIN AT POSITION ILLUSTRATED IN – FIG.1 CLEAN THIS AREA OF THE BIN WITH ISOPROPIC ALCOHOL AND PEEL PROTECTIVE STRIP OFF THE BACK OF BRACKET ADHESIVE BEFORE ATTACHING BRACKET. SEAL ANY GAPS WITH NSF STANDARD 51 CERTIFIED RTV.

2. SNAP UNIT INTO PLACE ON BRACKET (ROUTE WIRING HARNESS UNDER BRACKET AND OVER CORNER OF BIN – FIG.2)

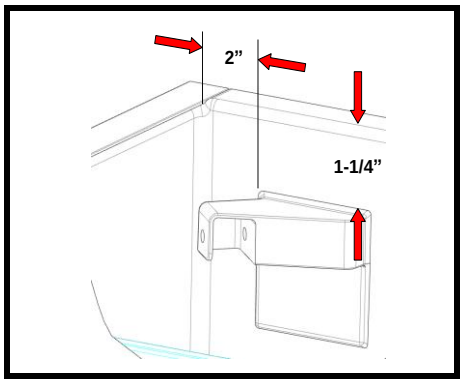
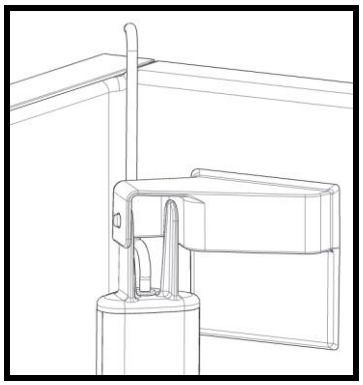
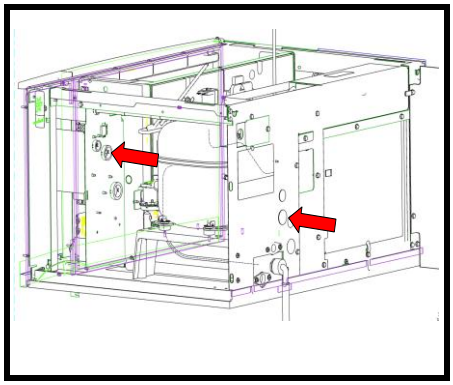


FIG.1


FIG.2


FIG.3

3. REMOVE 7/8” DIAMETER “KNOCKOUT” ON BACK PANEL OF CONTROL BOX - FIG.3. REMOVE NUT FROM STRAIN RELIEF ON WIRING HARNESS – FIG.4. ROUTE CONNECTORS ON END OF WIRING HARNESS THROUGH HOLE AND THEN THROUGH NUT FROM STRAIN RELIEF. TIGHTEN NUT ONTO STRAIN RELIEF, LEAVING ENOUGH SLACK TO ROUTE TO CONNECTORS ONTO CONTROL BOARD – FIG.5. TIGHTEN COMPRESSION NUT ENOUGH SO THAT CABLE CAN NOT SLIDE. INTERNALLY, THE CABLE SHOULD BE ROUTED SO AS TO AVOID CONTACT WITH HIGH VOLTAGE, HIGH HEAT OR SHARP OBJECTS.

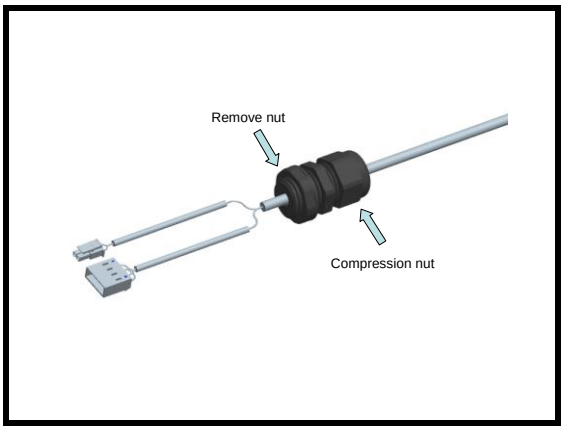


FIG.4

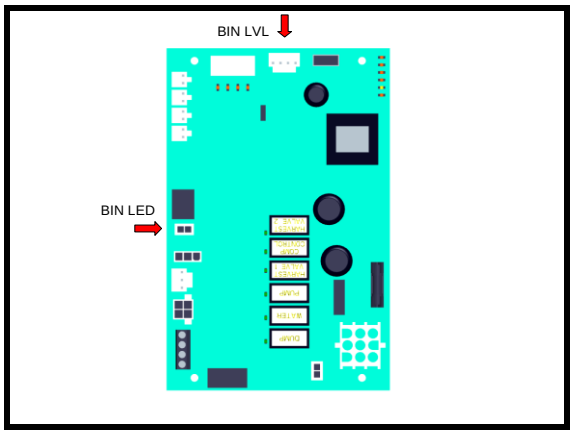


FIG.5

KIT K00426 TO BE USED ON B320 AND B400 BINS. KIT K00427 TO BE USED ON B420, B570, AND B970 BINS.

Manitowoc Ice
2110 South 26th Street, P.O. Box 1720, Manitowoc, WI 54221-1720 USA
Telephone 920-682-0161, Fax - Sales: 920-683-7589, Service/Parts: 920-683-7585, Other: 920-683-7879
Web Site - www.manitowocice.com