MANITOWOC ICE
2110 SOUTH 26TH STREET, MANITOWOC, WI 54220
800-545-5720
WWW.MANITOWOCICE.COM

Engineered for ease

Instruction Sheet


Subject: ArcticPure® AR-2800

WATER FILTER INSTALLATION


Replacing cartridges

NOTE: This system is equipped with an internal shut-off valve.

1. Turn cartridge slowly to the left, about 1/4 turn, until it stops. At this position, both inlet and outlet ports are closed and water pressure has been relieved.

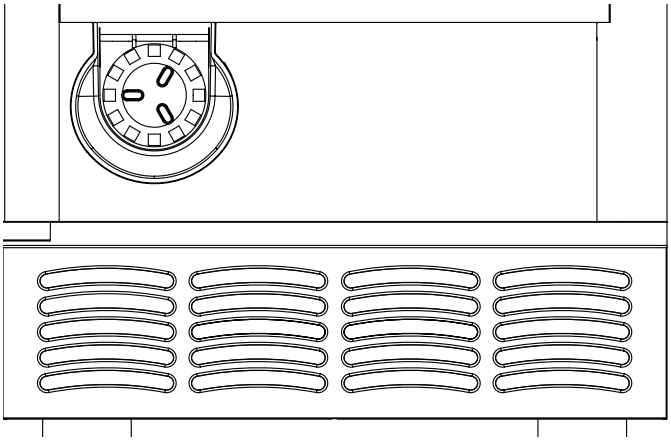

2. Pull used cartridge forward to remove, then discard. There may be a small amount of residual water drainage after pressure is relieved and during cartridge removal.
3. Remove cap from top of new cartridge and push new cartridge into filter head. Turn cartridge 1/4 turn to the right until it stops. Top surface of cartridge will become flush with bottom of the head when fully engaged.

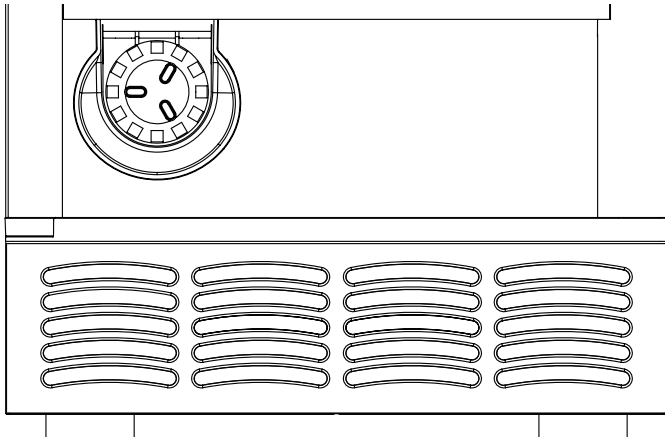

4. Run a 3-minute fill cycle of the ice machine to flush the filter. Then power off unit and restart to begin a new fill sequence and ice making cycle.
5. Press and hold the “Clean” button for 6 seconds to reset the counter and de-energize the filter light.

DANGER

To reduce the risk associated with choking,

- Do not allow children under 3 years of age to have access to small parts during the installation of this product.

To reduce the risk associated with the ingestion of contaminants:

- Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system. Systems certified for cyst reduction may be used on disinfected water that may contain filterable cysts.

⚠ Caution

To reduce the risk associated with property damage due to water leakage or flooding and to ensure optimal filter performance:

- Read and follow Use Instructions before installation and use of this system.
- Installation and use MUST comply with all state and local plumbing codes.
- Do not use a torch or other high temperature sources near filter system, cartridges, plastic fittings or plastic plumbing.
- Do not install if water pressure exceeds 120 psi (827 kPa). If your water pressure exceeds 80 psi (552 kPa), you must install a pressure limiting valve. Contact a plumbing professional if you are uncertain how to check your water pressure.
- On plastic fittings, never use pipe sealant or pipe dope. Use PTFE thread tape only, pipe dope properties may deteriorate plastic.
- Take care when using pliers or pipe wrenches to tighten plastic fittings, as damage may occur if over tightening occurs.
- Ensure all tubing and fittings are secure and free of leaks.
- Do not install unit if collet is missing from any fittings.
- Change the disposable filter cartridge every six months or sooner if you observe a noticeable reduction in water flow rate.
- Failure to replace the disposable filter cartridge at recommended intervals may lead to reduced filter performance and cracks in the filter housing, causing water leakage or flooding

For questions or concerns contact customer service at:
1-844-724-2273