MANITOWOC ICE
2110 SOUTH 26TH STREET, MANITOWOC, WI 54220

800-545-5720
WWW.MANITOWOCICE.COM

Instruction Sheet

Water Inlet Adaptor Installation

U & R SERIES - FLAKE / NUGGET ICE MACHINES

⚠ Caution


Do not apply heat to water inlet valve or water drain fittings. Heating will damage the nonmetallic connector. Do not over tighten fittings. One turn after hand tight is the maximum.

WATER CONNECTIONS

- Do not connect the ice machine to a hot water supply. Be sure all hot water restrictors installed for other equipment are working (check valves on sink faucets, dishwashers, etc).
- Do not exceed a maximum water temperature of 90°F (32°C).
- If water pressure exceeds the maximum of 80 psig (552 kPA) recommended pressure, obtain a water pressure regulator from your local plumbing supply house.
- Install a water shut-off valve and union for both the ice making and condenser water lines.
- Insulate water inlet lines to prevent condensation.
- Plumbing must conform to local codes.

ADAPTOR INSTALLATION PROCEDURE

1. Identify the water inlet valve fitting on the back of the ice machine.
   - Plastic water inlet fittings require a 3/8” NPT adaptor.
   - A brass water inlet fitting does not require an adapter.
2. Assemble the adaptor with the gasket to the water inlet valve as show:

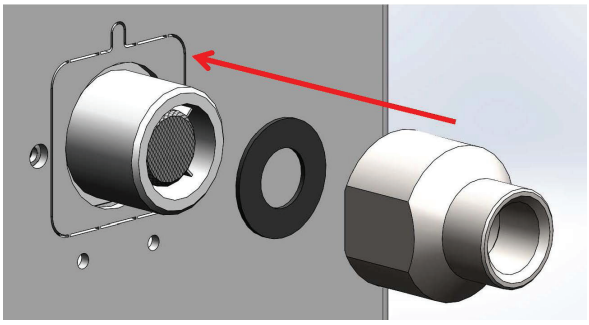

3. Hand tighten the adaptor, one turn after hand tightening is the maximum to prevent damage.

