
23-5107-9

REFRIGERATOR THERMOSTAT

Temperature Control Replacement Instructions
(Original Design)

1. Disconnect power supply to cabinet before service.
2. Remove control box cover.
3. Remove temperature control knob. Remove screws that fasten the temperature control to the control box.
4. Disconnect the electrical lead wires that terminate at 4 and 6 on the terminal board.
5. Remove the fan shroud from the evaporator coil inside the cabinet so that you can gain access to the capillary tube sensor for the temperature control. Remove the cap tube from the fins on the coil.
6. Pull the cap tube from the temperature control up through the control box.
7. Reverse all steps listed above for temperature control replacement. Be sure to insert the cap tube "exactly 5 inches" into evaporator coil and to seal the hole where the cap tube goes through the top of the cabinet.

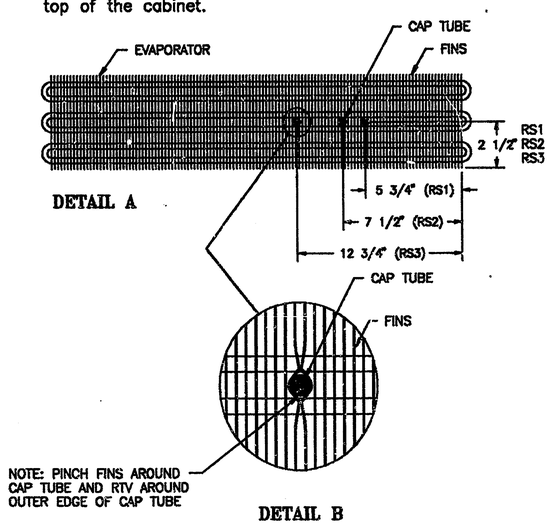

MANITOWOC EQUIPMENT WORKS
Division of The Manitowoc Company, Inc. • 2110 South 26th Street, P.O. Box 1720, Manitowoc, WI 54221-1720 U.S.A.
Phone: 414-682-0161 • RCA Telex 297863 MANCO-UR • FAX 414-683-7879

8733
1/92

SYM	DESCRIPTION OF REVISIONS	E.C.O.	BY	APP	DATE

ITEM NO.	NO. REQD	DESCRIPTION	MATERIAL	PART NO.
1	–	INSTALLATION INSTRUCTION	PAPER	8008733

TOLERANCE UNLESS SPECIFIED
.00=±.03, .000=±.015, ANG=±1°
DO NOT SCALE THIS DRAWING

THIS PRINT REMAINS THE PROPERTY OF MANITOWOC EQUIPMENT WORKS ALL INFORMATION CONTAINED THEREON IS CONFIDENTIAL. IT IS LOANED, SUBJECT TO RETURN UPON DEMAND, AND ON EXPRESS CONDITION THAT IT IS NOT TO BE COPIED OR USED DIRECTLY OR INDIRECTLY IN ANY WAY WHATSOEVER DETRIMENTAL TO OUR INTERESTS.

MANITOWOC EQUIPMENT WORKS
MANITOWOC, WISCONSIN

TITLE: INSTALLATION INSTRUCTION

DR	APP	E.C.O.	SIZE	DWG NO.	SHEET
KRH	[illegible]	3366	C	800873	1 OF 1
SCALE: 1.00 = 1.00		DATE: 1/14/92			