PARTS/SERVICE COMMUNICATOR

Subject: QFA-291 Microswitch Splashguard Kit Installation Instructions

Unit serial number range for kit installation: 981063560 to 040366737


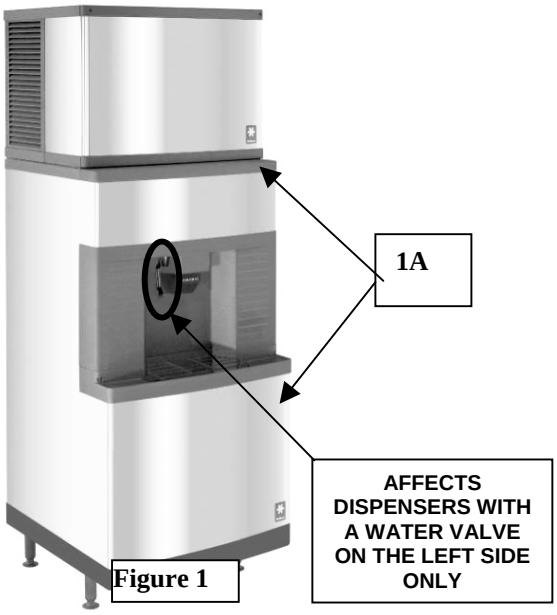


Figure 1

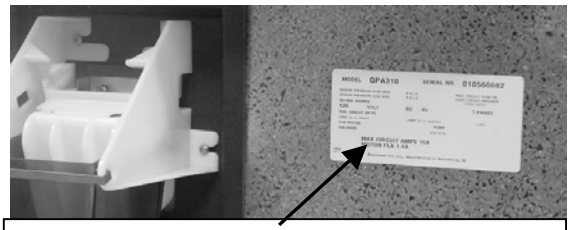

MODEL/SERIAL NUMBER LOCATION
A SECOND LOCATION FOR THE MODEL/SERIAL NUMBER IS ON THE BACK OF THE DISPENSER IN THE UPPER RIGHT CORNER


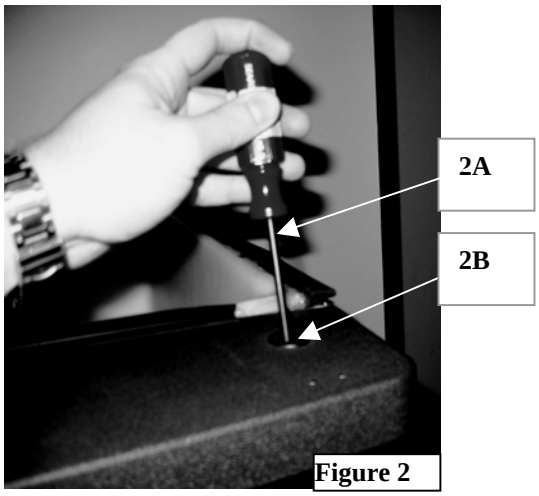


Figure 2

Parts Included in Kit 9700003

Qty.	Description
1 ….	.Instructions Microswitch Guard Install
1 …...	Microswitch Splash Guard with Gasket
1 …...	Fastener Clip

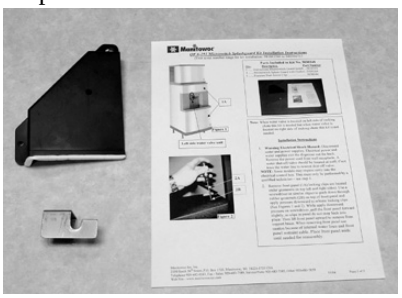

This kit must be installed by qualified general maintenance personnel or a qualified service technician.

Note: When water valve is located on left side of rocking chute this kit is needed, but when water valve is located on right side of rocking chute this kit is not needed.

Installation Instructions

1. **Warning Electrical Shock Hazard:** Before proceeding with these kit instructions the water and electrical power supply must be disconnected to prevent possible property damage or personal injury. Electrical power and water supplies exit the dispenser out the back. Remove the power cord from wall receptacle. A water shut-off valve should be located at wall. If not, trace the water line to nearest shut-off valve.

NOTE: Some models may require entry into the electrical control box. This must only be performed by a qualified technician – see step 4.

2. Remove front panel (1A) locking clips are located under grommets on top left and right sides. Use a screwdriver or similar object (2A) to push down through rubber grommets (2B) on top of front panel and apply pressure downward to release locking clips (see Figures 1 and 2). While applying downward pressure on screwdriver, pull the front panel forward slightly, so clips in panel do not snap back into place. Then lift front panel upward to remove from support brace. When removing front panel, use caution because of internal water lines and front panel restraint cable. Place front panel aside until needed for reassembly.

MANITOWOC ICE, INC. 2110 S. 26th ST., PO box 1720, Manitowoc, WI. 54221-1720 USA
Phone 920-682-0161 Service Fax 920-683-7585 Website - www.manitowocice.com

QFA-291 Microswitch Splashguard Kit Installation Instructions

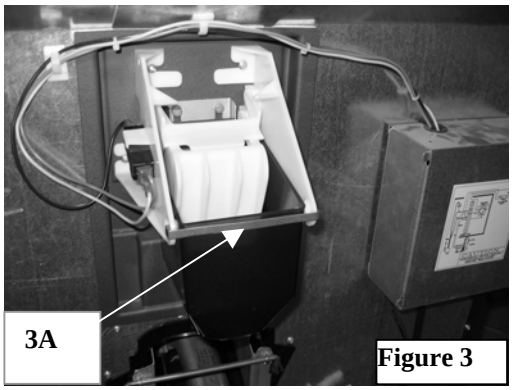


Figure 3

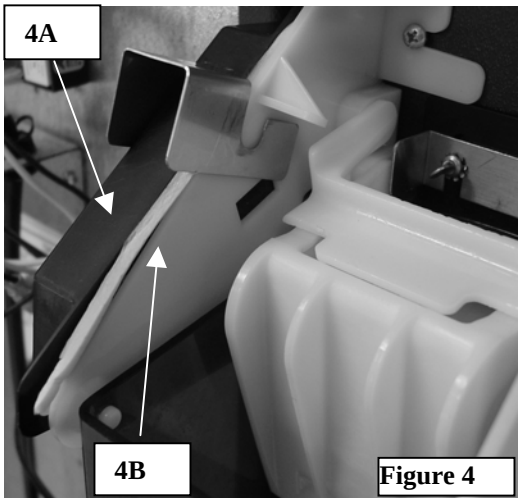


Figure 4

Align edges; install stainless steel clip; seat clip flush to splashguard; reinstall rocking chute outer bracket.

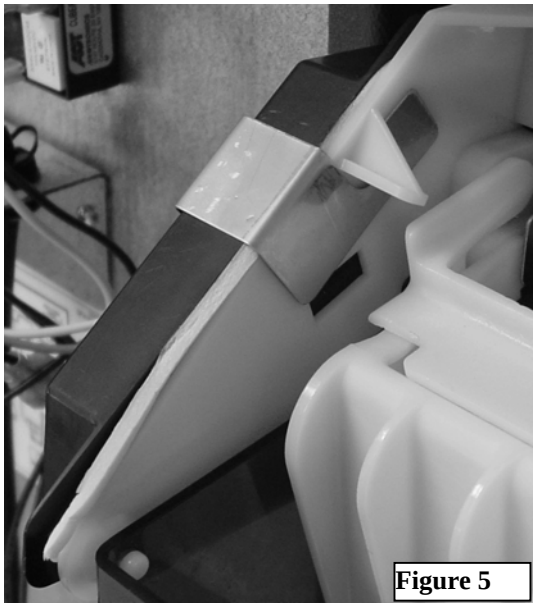


Figure 5

Installation Instructions

3. Remove rocking chute outer bracket (3A).
4. See Figure 4 - Align front edges of splashguard (4A) and bracket (4B). Route the three wires out the bottom of splashguard.

NOTE: If the wires are too short to route below the splashguard, the control box cover must be removed, wire ties cut, and wire fed out of control box to obtain the length of wire needed. A qualified technician must perform this step; call 1-888-235-9703 to locate a qualified technician in your area.

See Figure 4 & 5 – Place stainless steel clip over splashguard and white bracket. Press down until clip is flush with the splashguard. Reinstall rocking chute outer bracket removed in step 3 by snapping into place.

5. Reassemble front panel to unit by placing slots on bottom of front panel over tabs on support brace. Push panel upward and press to snap locking clips into latching brackets. Be sure front panel is installed correctly and securely in place.
6. Reconnect electrical power supply and turn-on water supply to unit. Be sure unit will dispense water and ice before placing into service.



Figure 6

COMPLETED INSTALLATION

WIRE ROUTING IS REPRESENTATIVE AND IS NOT THE SAME ON ALL DISPENSERS.