Touchless Ice Dispensers

Model: ☐ SPA-162 ☐ SFA-192



SFA Model
Indigo NXT IT0620 Ice Machine
SFA-192 Ice & Water Dispenser
*Ice machine and bin sold separately



SPA Model
Indigo NXT IT0620 Ice Machine
SPA-162 Ice Dispenser
*Ice machine and bin sold separately

While both models are designed for filling ice buckets and glasses, the SFA model also dispenses filtered water with its built-in water valve. The touchless lever ensures that the ice chute is activated by a bucket or glass, not a hand. Coupled with an Indigo NXT ice machine, you can program it to be off at night—so while hotel guests are sleeping, the ice machine can be too!

Sanitation



- **Easy Interior Cleaning** - hinged front door swings wide open, providing easy access to food zone. Removable water trough, distribution tube, curtain, water probe and water pump allow complete, efficient cleaning. Select components made with AlphaSan® antimicrobial.
- **Low-Maintenance, Durable Exterior** - DuraTech® provides superior, corrosion resistance above stainless steel. Innovative clear coat resists fingerprints and dirt, helping keep the machine cleaner longer
- **Added Protection** - Available LuminIce® Growth Inhibitor helps control the growth of bacteria and yeast within the food zone. Indicator on the display provides operational status

Sustainability & Value

- **Ease of Operation** - easyTouch® Display takes the guesswork out of owning and operating an ice machine with icon-based touch screen
- **Consistent Output** - Acoustical Ice Sensing Probe and Active Sense ensure consistent harvest, even in challenging water conditions and environments
- **Intelligent Diagnostics** - worry-free operation with 24-hour preventative maintenance and diagnostic feedback
- **Cost Savings** - reduce energy costs with programmable Ice production by scheduling during lower rate hours and controlling daily ice volume
- **Overall Lifetime Value** - lower cost of ownership over the life of machine with decreased energy consumption as compared to legacy R404A models

Standard Features

- **Robust** - 120 lbs. (54.4 kgs.) ice storage capacity. Accepts 22" (55.88 cm) wide Manitowoc ice machine.
- **Space-Saving** - Only 22" (55.88 cm) wide, 31" (78.7 cm) deep, and 75.5" high (191.77 cm).
- **Touchless** - The touchless lever eliminates the need to touch the machine using hands to dispense ice.
- **Reliabile Operation** - Efficient built-in agitator assures 100% dispensing. Oversized drain pan collects larger quantity of ice overflow.
- **Long-lasting** - DuraTech™ exterior provides superior corrosion resistance. Stainless finish with innovative clear-coat resists fingerprints and dirt.

Ice Shape




Half Dice
⅜" x 1⅛" x ⅞"
(0.95 x 2.86 x 2.22 cm)



Dice
⅞" x ⅞" x ⅞"
(2.22 x 2.22 x 2.22 cm)

Touchless Ice Dispensers

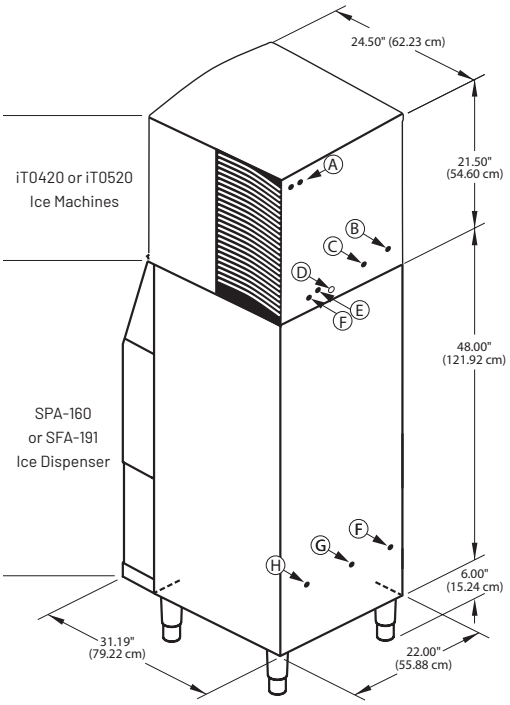

Ⓐ Electrical Entrance (2) Options
Ⓑ 3/8" (0.95 cm) F.P.T. Water Condenser Inlet (water-cooled units)
Ⓒ 1/2" (1.27 cm) F.P.T. Water Condenser Outlet (water-cooled units)
Ⓓ 3/8" (0.95 cm) F.P.T. Ice Making Water Inlet
Ⓔ 1/2" (1.27 cm) F.P.T. Ice Making Water Drain
Ⓕ Dispenser Electrical Entrance
Ⓖ 1/2" (1.27 cm) F.P.T. Melting Tray Pan Drain Floor To Drain Distance = 13" (With 6" legs)
Ⓗ Water Inlet: SFA-191 only

Installation Note
Dispensers have no minimum clearance, when installing an ice machine/ dispenser combination follow the clearance requirements for the ice machine being installed.

Ice Machine Electric

- **Note** - Dispenser will accept single 22" wide ice machine. Ice machine ordered separately. Choose Dice or Half Dice cube size. Refer to ice machine specification sheet for electrical and complete AHRI.
- **Dispenser Electric** - 115/60/1 (208-230/60/1 and 230/50/1 also available).
- **Maximum Circuit Fuse Size** - 15.0 amps. HACR-type circuit breakers can be used in place of fuses.
- **Dispenser Electrical Connection** - 6' power cord, rated 125 VAC, 16-3 conductors with standard 3-prong, straight-blade, ground-type plug (NEMA configuration 5-15P).
- **Motor** - 1.6 amps maximum. Permanently lubricated.
- **Service Access** - Dispenser door removes easily to access components.
- **Model Options** - SPA-162 touch-less activated lever only SFA-192 touch-less activated lever with water valve.

Specifications

	Model	Ice Shape	Ice Production 24 Hours	
			70° Air/ 50° F Water	90° Air/ 70° F Water
SERIES IT0420 (115 VOLT)	IDT-0420A	dice	470 lbs/213 kgs	375 lbs/170 kgs
	IDT-0420W		454 lbs/206 kgs	400 lbs/181 kgs
	IYT-0420A	half-dice	460 lbs/209 kgs	375 lbs/170 kgs
	IYT-0420A		490 lbs/222 kgs	425 lbs/193 kgs

	Model	Ice Shape	Ice Production 24 Hours	
			70° Air/ 50° F Water	90° Air/ 70° F Water
SERIES IT0620 (115 VOLT)	IDT-0620A	dice	560 lbs/254 kgs	450 lbs/204 kgs
	IDT-0620W		530 lbs/240 kgs	450 lbs/204 kgs
	IYT-0620A	half-dice	575 lbs/261 kgs	465 lbs/211 kgs
	IYT-0620W		560 lbs/254 kgs	485 lbs/220 kgs

Commercial Warranty - **Dispenser** three (3) years parts and labor
Ice Maker three (3) years parts and labor
Evaporator five (5) years parts and labor
Compressor five (5) years parts, three (3) years labor

Accessories

LuminIce® Virus and Bacteria Inhibitor

Controls viruses and bacteria in the ice machine.



Arctic Pure® Plus Water Filters

Reduces sediments and contaminants down to 0.5 microns, and 95% of chlorine taste & odor. Use with a pre-filter is recommended.



PENTAIR
2110 South 26th Street | Manitowoc, WI 54220 | United States
920.682.0161 (US Only) | 920.683.7589 Fax | manitowocice.com

All indicated Pentair trademarks and logos are property of Pentair. Third party registered and unregistered trademarks and logos are the property of their respective owners.
©2023 Pentair. All rights reserved.

43580 10/23