Manitowoc

INDIGO NXT

QuietQube® iF600C Remote Ice Cube Machine

Air-Cooled Ice Cube Machine with Patented CVD Technology®

Models

☐ IYF0600C



IYF0600C Ice Cube Machine - 115V



CVD Condensing Unit - 230V



IY0600C
Ice Machine
on a D-570 bin

*Ice machine and bin sold separately

Standard Features

QuietQube Series Remote System consists of a remote condensing unit, interconnecting refrigerant lines, ice machine head section along with an ice storage bin, countertop dispenser, or floor dispenser. All ordered separately. QuietQube ice machine with CVD condensing unit is designed as a Manitowoc system and cannot be used with any other ice machine or remote condenser brand.

- **Space-Saving Design** – Up to 634 lbs. (288 kgs) daily ice production and only 30" (76.20 cm) wide.
- **easyTouch® Display**- New icon based touch screen takes the guess work out of owning and operating an ice machine.
- **Programmable Ice Production** – Now its super easy to program your ice machine to be off at certain times of the day to save money with fluctuating electrical rates. Also programmable by daily ice production volume and night time programming.
- **Easy to Clean Foodzone** – Hinged front door swings out for easy access. Removable water-trough, distribution tube, curtain, and sensing probes for fast and efficient cleaning. Select components made with AlphaSan® antimicrobial.
- **Intelligent Diagnostics** – provide 24 hour preventative maintenance and diagnostic feedback for trouble free operation.
- **Acoustical Ice Sensing Probe** – Unique patented technology allows for reliable operation in challenging water conditions and environments.
- **DuraTech™ Exterior** – provides superior corrosion resistant above stainless steel. Innovative clear-coat resists fingerprints and dirt making it easier to keep clean.
- **Available LuminIce II Virus and Bacteria Inhibitor**- Controls viruses, bacteria, mold and yeast within the food zone to keep the machine clean longer. A new sanitation icon lets you know the operational status.
- **Active Sense** – insures consistent ice harvest in all environmental conditions. This software works in conjunction with the acoustical ice sensing probe improving reliability and performance.



Ice Shape



Half Dice
⅜" x 1⅛" x ⅞"
(.95 x 2.86 x 2.22 cm)

CALIFORNIA LOW LEAD QUALIFIED · NSF · c UL US LISTED · AHRI CERTIFIED · AQ · ISO 9001:2015

QuietQube® iF600C Remote Ice Cube Machine

2110 South 26th Street
Manitowoc, WI 54220

Tel: 1.920.682.0161
Fax: 1.920.683.7589


www.manitowocice.com

WELBILT

QuietQube® iF600C Remote Ice Cube Machine

iF0600C Ice Machine

Ⓐ Electrical Entrance (2) Options
Ⓑ Suction Refrigerant Shut-off Valve
Ⓒ Liquid Refrigerant Shut-off Valve
Ⓓ 3/8" (0.95 cm) F.P.T. Ice Making Water Inlet
Ⓔ 1/2" (1.27 cm) F.P.T. Ice Making Water Drain

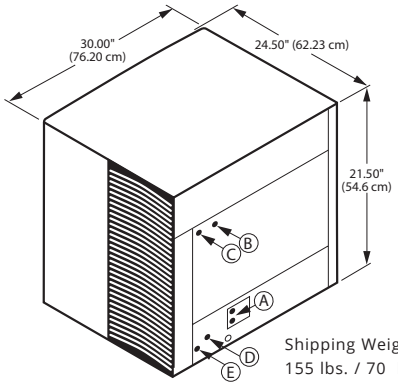

Installation Note
Minimum installation clearance:

Top: 5" (13 cm)
Back: 5" (13 cm)
Sides: 5" (13 cm)

Shipping Weight:
155 lbs. / 70 kg

Ice Machine Electric

115/60/1 standard.
(230/50/1 also available, consult factory.)

Total Amps: 1.1
Max. fuse size: 15 amps
HACR-type circuit breakers can be used in place of fuses.

Specifications

Operating Limits:
Ambient Temperature Range:
40˚ to 110˚F (4.4˚ to 43.4˚C)

Water Temperature Range:
40˚ to 90˚F (4.4˚ to 32.2˚C)

Water Pressure Ice Maker Water In:
Min. 20 psi (137.9 kPA)
Max. 80 psi (551.1 kPA)


Remote Air-Cooled Ice Machine

Model	Ice Shape	Ice Production 24 Hours		Power kWh/ 100 lbs. @90°Air/70°F*
		70°Air/50°F Water 21° Air/10°C Water	90°Air/70°F Water* 32° Air/21°C Water	
IYF0600C	half-dice	600 lbs.	530 lbs.	6.00
		272 kg	240 kgs	
Water usage/100 lbs./45.4 kgs of Ice				
Potable Water: 20 gallons, 75.7 liters				

Ice machine for use with ice storage bin or ice dispenser and CVD condensing unit all ordered separately.

*kWh per 100 lbs. is total power of ice machine and condensing unit. Ice machine is 1 ph only. Condensing unit is 1 ph or 3 ph.

CDF0600_A Remote Condensing Unit

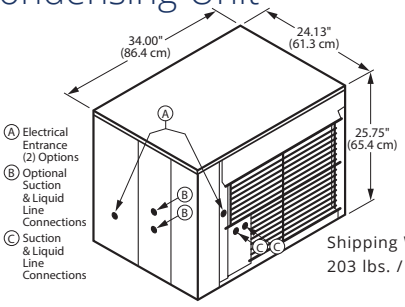

Ⓐ Electrical Entrance (2) Options
Ⓑ Optional Suction & Liquid Line Connections
Ⓒ Suction & Liquid Line Connections

Shipping Weight:
203 lbs. / 92 kgs

Condensing Unit Electric

208-230/60/1 standard. 208-230/60/3 and 230/50/1 also available. 50 Hz version of this model meets the international standard, IEC335-1, requirements for "tropical rating," the most severe duty rating an ice machine can obtain, (consult factory). HACR-type circuit breakers can be used in place of fuses.
Note: QuietQube ice machine power supply is wired independent of CVD condensing unit.

Min. circuit ampacity:	9.0 1ph	6.6 3ph
Max. fuse size:	15 amps 1ph	15 amps 3ph


HACR-type circuit breakers can be used in place of fuses.

BTU Per Hour: 11,800 (average) 13,700 (peak)
Compressor: Nominal rating: 1 HP
Operating Limits:
Ambient Temperature Range:
-20˚ to 120˚F (-29˚ to 49˚C)

Installation Information and Dimensions:
Maximum Line Length
—100' (30.5 m).*

Maximum Vertical Rise*
—35' (10.7 m) above ice machine.

Maximum Vertical Drop
—15' (4.5 m) below ice machine.



Minimum Installation Clearance
—Top/sides: 0" (0 cm)
—Back/Front: 48" (122 cm).

*A rise over 20' (6 m) requires S-Trap Kit K-00172 - ordered separately.

Indigo NXT Remote Tubing Kits


Model	Line Length ft.	Line Length m	Weight lbs.	Weight kg
RC-21	20	6	12	5
RC-31	30	9	17	9
RC-51	50	15	27	13

Accessories

LuminIce® II Virus and Bacteria Inhibitor
controls viruses and bacteria in the ice machine.



External Scoop holder
protect the ice scoop with the NSF approved versatile scoop holder.



Arctic Pure® Plus Water Filters
reduce sediments and chlorine contaminants down to .5 microns. Use with a Pre-filter is recommended.



iAuCS®
schedules and performs routine ice machine cleaning automatically.



Manitowoc Ice reserves the right to make changes to the design or specifications without prior notice.

2110 South 26th Street
Manitowoc, WI 54220

Tel: 1.920.682.0161
Fax: 1.920.683.7589

www.manitowocice.com

6674E
06/22