MANITOWOC ICE
2110 SOUTH 26TH STREET, MANITOWOC, WI 54220

800-545-5720
WWW.MANITOWOCICE.COM

Instruction Sheet


Subject: ArcticPure® Water Filter Replacement

KOO337, K00338, K00339

For use in systems AR-Pre (K00337), AR-10000 (K00338), or AR-20000 (K00339). Please refer to the Performance Data Sheet for more information regarding flow rates, capacities, and claims.


NOTE: This system is equipped with an internal shut-off valve.


1. Turn cartridge in one motion to the left, about 1/4 turn, until it stops. At this position, both inlet and outlet ports are closed and water pressure has been relieved.

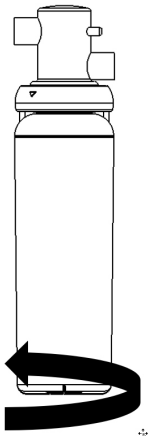


2. Pull used cartridge straight down and discard.

NOTE: There may be a small amount of residual water drainage after pressure is relieved and during cartridge removal.

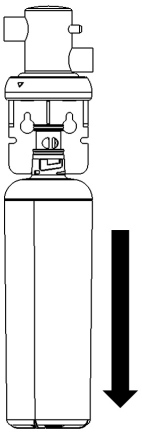



3. Push new cartridge into filter head. Insert the cartridge into the filter head and push up and turn cartridge 1/4 turn to the right until it stops. Top surface of cartridge will become flush with bottom of the head when fully engaged.

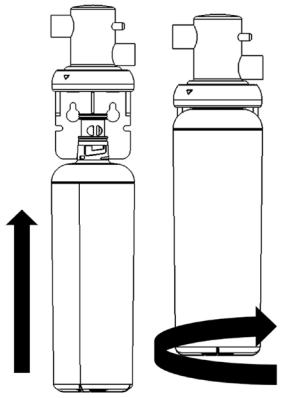

4. Open the downstream flush valve (if installed) and flush new filter cartridge for 10 minutes, expelling any trapped air and carbon fines. Water may run cloudy but will quickly clear. Close the downstream flush valve when complete.

⚠Caution

Should the cartridge drop from a height of greater than 3 feet, inspect the outer casing. If there is any evidence of the case cracking do not use

AR-Pre, AR-10000, and AR-20000 systems are certified by IAPMO R&T against CSA B483.1; NSF/ANSI 372 for Low Lead Content; NSF/ANSI 42 and/or *NSF/ANSI 53 for the reduction of claims listed in the Performance Data Sheet.

*NSF/ANSI 53 Cyst reduction claims are valid only when the system flow is restricted at or below the specified range and/or as specified in the ice machine capacity ranges. System flow rates should be verified after installation to ensure filterable cyst reduction per above.

Please see ice machine manufacturer's technical publications for internal flow controller maximum operating flow rate specifications.

Document Number: 000016621_00 1/21