
S BINS

Bin Door/Hinge Installation Instructions

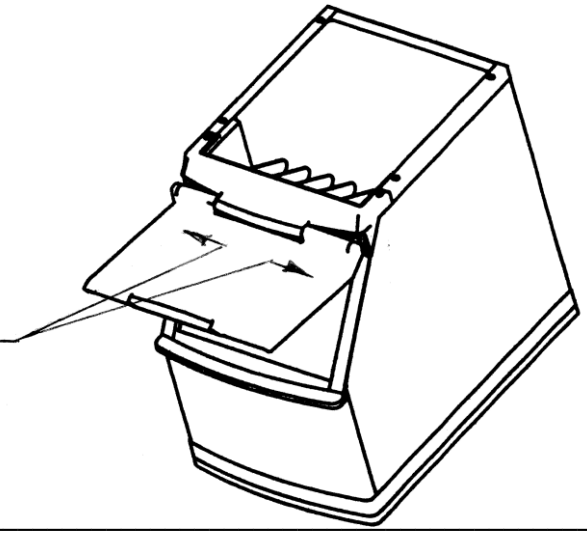


TO REMOVE BIN DOOR

Step 1: Hold door open in horizontal position.

Step 2: Reach under bin door. Use a long-shafted screwdriver to push hinge pins from center of ice deflector outward towards bin door sides.

TO REPLACE HINGE SLEEVES

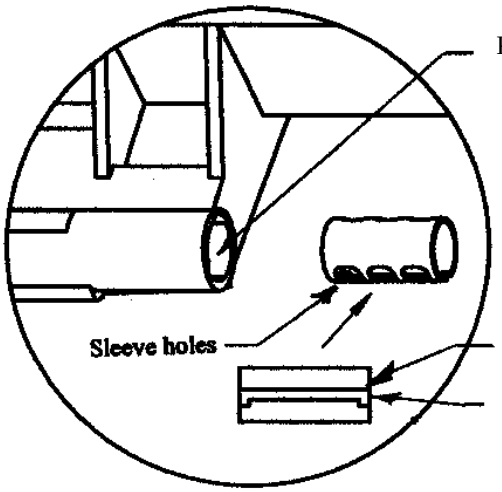


Step 1: While noting key slot and end notch locations, remove hinge sleeves.

Step 2: While noting key slot and end notch locations, insert new hinge sleeves with the same orientation as the old hinge sleeves.

Step 3: Apply a generous amount of food machinery grease on inside surface of sleeve to thoroughly coat surface.

TO REPLACE HINGE PINS AND REINSTALL BIN DOOR

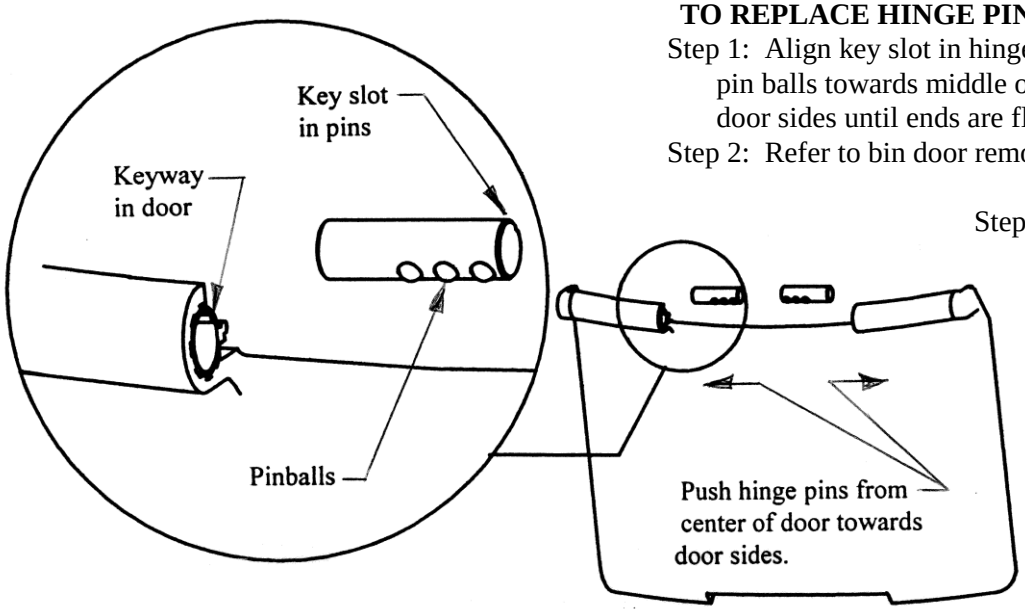

Step 1: Align key slot in hinge pins with door keyway. With pin balls towards middle of door, push hinge pins into door sides until ends are flush.

Step 2: Refer to bin door removal and reverse procedures.

Step 3: If bin door does not stay open, hold the door in vertically open position and slide hinge pins side-to-side until balls engage into sleeve holes.

Manitowoc Ice
2110 South 26th Street, P.O. Box 1720, Manitowoc, WI 54221-1720 USA
Telephone 920-682-0161, Fax - Sales: 920-683-7589, Service/Parts: 920-683-7585, Other: 920-683-7879
Web Site - www.manitowoc.com

8011193
10/22/09